



MANHOLE INVERT PLAN

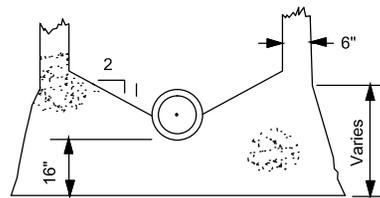

12' MAXIMUM DEPTH MH
BASE SECTION

NOTES:
IF MANHOLE CONSTRUCTION IS NOT CONTINUOUS
POUR, A RUBBER WATER STOP GASKET WILL
BE REQUIRED

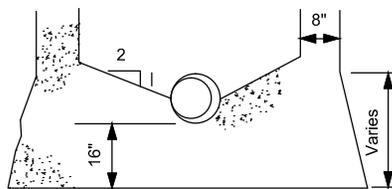


EXTRA DEPTH MH
BASE SECTION

MH COATING NOTE:

OUTSIDE COATING OF MANHOLE SHALL BE
WITH ASPHALTIC BLACK, AS AVAILABLE AT
UNITED PAINT COMPANY.

METHOD OF APPLICATION SHALL BE PER-
FORMED BY BRUSH OR BY LOW PRESSURE
SPRAYER.

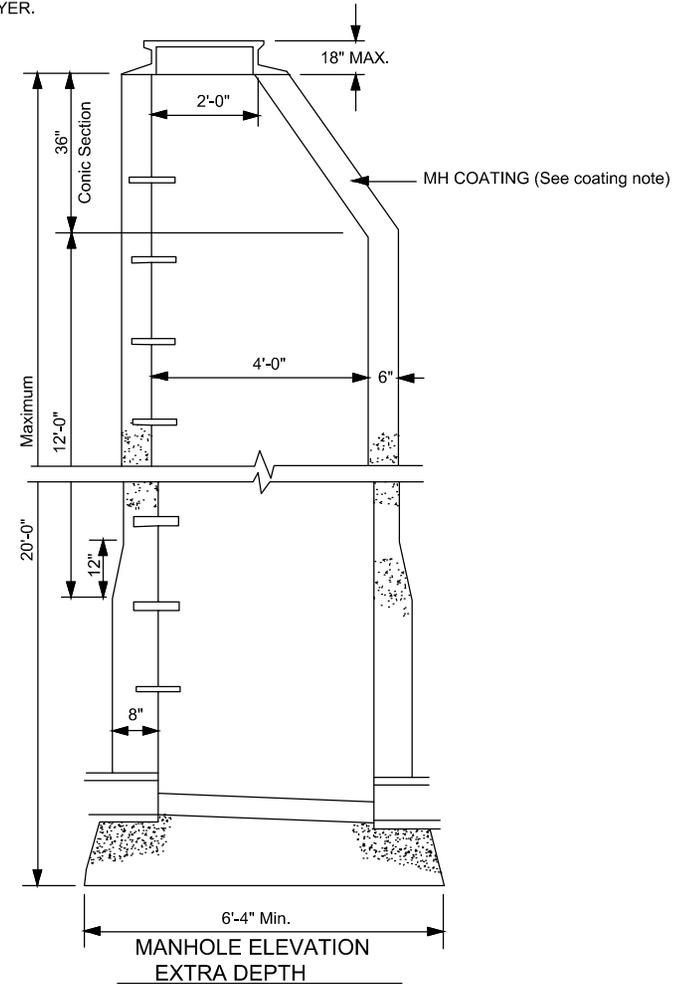

NOTES:

1. ALL CONCRETE SHALL BE 4000 PSI.

REVISION		
ITEM NO.	DESCRIPTION OF CHANGE	APPROVAL DATE

TOWN OF COLLIERVILLE
MONOLITHIC MANHOLE
(POURED IN PLACE)

TOC-206