


NOTES

1. PRE-CUT EXP. JOINTS MATERIAL SHALL BE USED IN ALL EXP. JOINTS.
2. DUMMY JOINTS SHALL BE INSTALLED AT 10 FT INTERVALS, MAXIMUM.
3. EXPANSION JOINTS SHALL BE INSTALLED AT 30 FT, MAXIMUM.
4. EXPANSION JOINTS SHALL BE INSTALLED AT ENDS OF RADIUS.
5. EXPANSION JOINTS SHALL BE LOCATED A MAXIMUM OF 10 FT FROM INLET STRUCTURES.


REVISION		
ITEM NO.	DESCRIPTION OF CHANGE	APPROVAL DATE

TOWN OF COLLIERVILLE
6-30 CURB & GUTTER

TOC-502

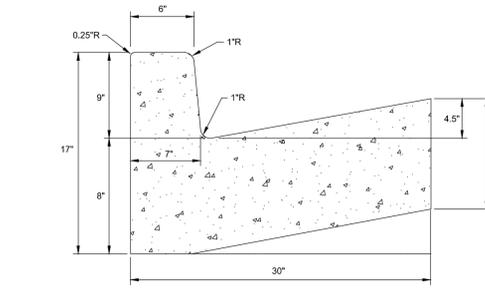

9-30 CURB AND GUTTER

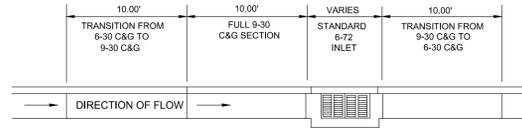


NOTES

1. PRE-CUT EXPANSION JOINT MATERIAL SHALL BE USED IN ALL EXPANSION JOINTS.
2. EXPANSION JOINT MATERIAL SHALL BE INSTALLED AT ENDS OF TRANSITION SECTIONS.
3. EXPANSION JOINT MATERIAL SHALL BE INSTALLED AT A MAXIMUM OF 10' FROM INLET STRUCTURES.
4. CONCRETE TO BE 4,000 PSI.

REVISION		
ITEM NO.	DESCRIPTION OF CHANGE	APPROVAL DATE

TOWN OF COLLIERVILLE
6-30 TO 9-30 CURB TRANSITION

TOC-503

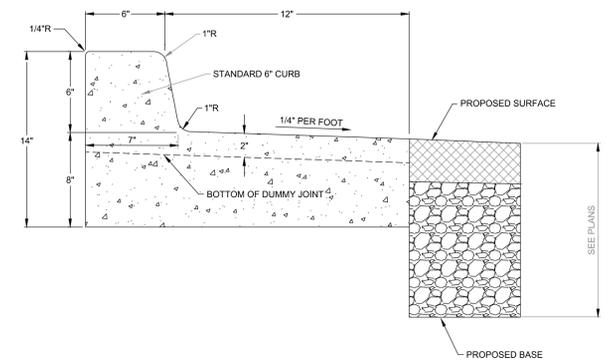


NOTES

1. EXPANSION JOINTS SHALL BE LOCATED AT ENDS OF RADIUS.
2. EXPANSION JOINTS SHALL BE INSTALLED AT 30 FT, MAXIMUM.
3. EXPANSION JOINTS SHALL BE LOCATED A MAXIMUM OF 10 FT FROM INLET STRUCTURE.
4. PRE-CUT EXPANSION JOINT MATERIAL SHALL BE USED IN ALL EXPANSION JOINTS.
5. DUMMY JOINTS SHALL BE INSTALLED AT 10 FT INTERVALS, MAXIMUM.
6. CONCRETE TO BE 4000 PSI.

REVISION		
ITEM NO.	DESCRIPTION OF CHANGE	APPROVAL DATE

TOWN OF COLLIERVILLE
6-18 MEDIAN CURB

TOC-504

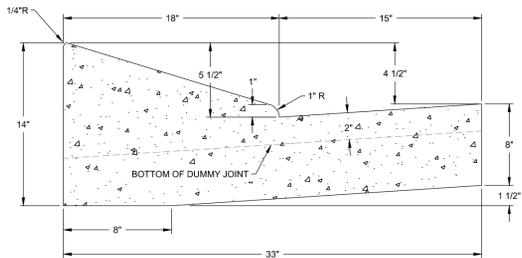


NOTES

1. PRE-CUT EXP. JOINTS MATERIAL SHALL BE USED IN ALL EXP. JOINTS.
2. DUMMY JOINTS SHALL BE INSTALLED AT 10 FT INTERVALS, MAXIMUM.
3. EXP. JOINTS SHALL BE INSTALLED AT 30 FT, MAXIMUM.
4. EXP. JOINTS SHALL BE INSTALLED AT ENDS OF RADIUS.
5. EXP. JOINTS SHALL BE LOCATED A MAXIMUM OF 10 FT, FROM INLET STRUCTURES.
6. CONCRETE SHALL BE 4000 PSI.

REVISION		
ITEM NO.	DESCRIPTION OF CHANGE	APPROVAL DATE

TOWN OF COLLIERVILLE
VALLEY CURB AND GUTTER

TOC-507

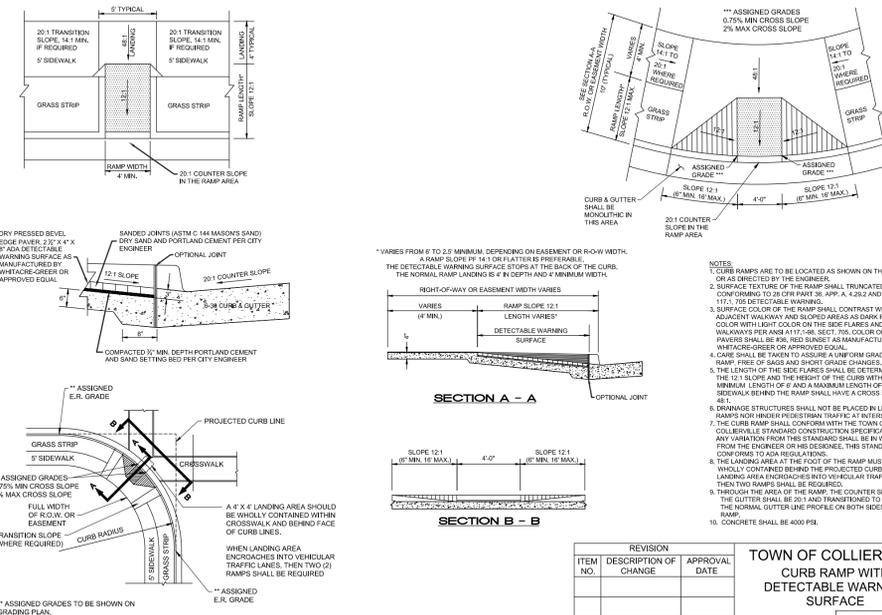


REVISION		
ITEM NO.	DESCRIPTION OF CHANGE	APPROVAL DATE

TOWN OF COLLIERVILLE
CURB RAMP WITH
DETECTABLE WARNING
SURFACE

SCALE: NONE

TOC-510

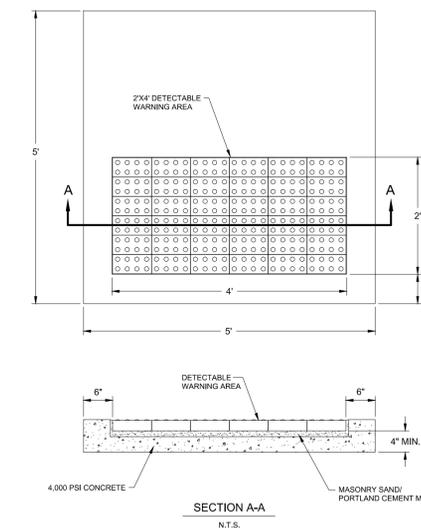

NOTES


1. DETECTABLE WARNING AREA TO BE TRUNCATED DOME BRICK PAVERS. BRICK PAVERS TO BE RED IN COLOR.
2. MAXIMUM LANDING SLOPE IN ANY DIRECTION IS 2%.

REVISION		
ITEM NO.	DESCRIPTION OF CHANGE	APPROVAL DATE

TOWN OF COLLIERVILLE
SIDEWALK LANDING
DETAIL

SCALE: NONE
TOC-512

EDGES TO BE TRIMMED TO STRAIGHT VERTICAL LINE. ANY LOOSE OR DISTURBED PAVEMENT MUST BE REMOVED AND REPLACED. (TYPICAL)

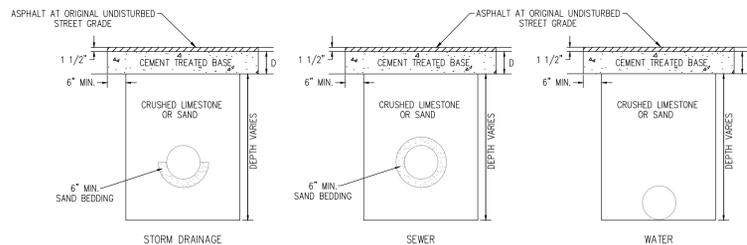

NOTES


- 1) ALL CONCRETE PATCH WORK MUST BE APPROVED BY THE TOWN ENGINEER PRIOR TO PLACEMENT.
- 2) CEMENT TREATED BASE MUST BE PLACED AND COMPACTED WITHIN 3 HOURS OF THE TIME IT IS LOADED AT THE PLANT.
- 3) GRANULAR BACKFILL SHALL BE CONSOLIDATED WITH A VIBRATING PLATE COMPACTOR.
- 4) CEMENT TREATED BASE SHALL BE A PUMMLED GRAVEL MIX WITH NO LESS THAN 10% CEMENT BY VOLUME.

STREET CLASSIFICATION	D
MAJOR	18"
COLLECTOR	16"
OTHER	12"

REVISION		
ITEM NO.	DESCRIPTION OF CHANGE	APPROVAL DATE

TOWN OF COLLIERVILLE
STREET CUT
REPAIR DETAIL

TOC-526

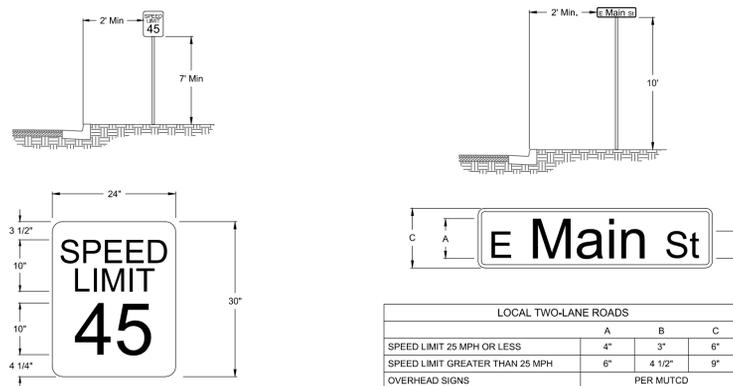

1. THE STREET NAME SIGN SHALL BE RETROREFLECTIVE USING HIGH-INTENSITY GRADE OR BETTER.
2. THE BORDER SHALL BE THE SAME COLOR AS THE LEGEND.
3. PRIVATE STREET SIGNS SHALL HAVE A HIGH-INTENSITY RETROREFLECTIVE BLUE BACKGROUND.
4. PUBLIC STREET SIGNS SHALL HAVE A HIGH-INTENSITY RETROREFLECTIVE GREEN BACKGROUND.
5. ALL LETTERING SHALL BE SERIES C-2000 STYLE PER MUTCD
 - a) BLUE-3M PRODUCT CODES 8075 OR EQUIVALENT
 - b) GREEN-3M PRODUCT CODE 3877 OR EQUIVALENT
6. CONTACT THE TOWN OF COLLIERVILLE SIGN SHOP WITH ANY QUESTIONS AT 457-2800.

REVISION		
ITEM NO.	DESCRIPTION OF CHANGE	APPROVAL DATE

TOWN OF COLLIERVILLE
GROUND MOUNTED
STREET SIGN

TOC-527